


MIDWEST RADIO CORPORATION.

INSTRUCTIONS FOR CONNECTING AND OPERATING PHONOGRAPH
RECORD CHANGER ON MIDWEST 10 TUBE - 1934.

Remove cardboard packing holding phonograph record changer in place. Connect A.C. plug from record changer to receptacle on A.C. cord of Radio Chassis.

To connect phonograph unit to radio chassis, place phone tips in jacks at rear of chassis near name plate and place metal shielding lug under nut on bolt at side of jacks. Be sure to put red wire in jack with red dot on it, and green wire in jack with green dot on.

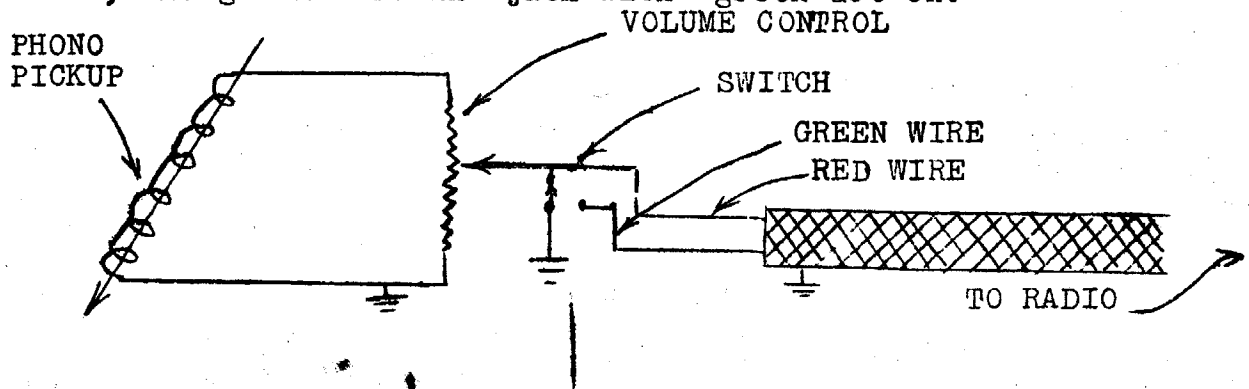

To start phonograph motor turn switch located in right hand corner, one position to right. To operate phonograph turn switch to second position or extreme right.

Volume of phonograph is controlled by small knob on top of tone arm. When operating phonograph, set must be turned on and volume control on set turned down, or to the left.

Eight, ten inch records may be placed on turn table at one time. Be sure all records are same size and thickness. Note: Bottom record must always be of standard thickness and must not be warped or changer device will throw last record from turn table which might result in damage to unit.

Do not use ordinary steel phonograph needle. Use a high grade needle that will play at least eight to twelve records.

Be sure phonograph console is level to insure satisfactory operation of record changing unit.

